


Z-MAX® Copper Connectivity System

6A Shielded Outlets | Regional Availability – Global



The shielded Z-MAX outlet offers best-in-class performance in every critical specification, exceeding all Category 6A performance requirements, including alien crosstalk. Its innovative features not only speed and simplify termination, but remove installation variability for consistently high and repeatable performance – every termination, every time!

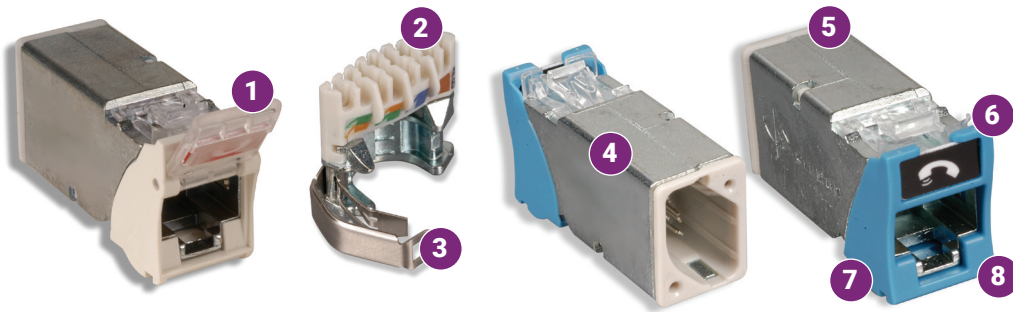

1. Spring Door Option

Minimizes exposure to dust and other contaminants.

2. Guided Termination Features

Linear lacing channels guide correct conductor placement while 2-sided color-coding provides wiring verification before and after lacing.

3. Robust Hinged Cable Retention

Clip accommodates multiple cable diameters.

4. Fastest Termination Time

Zero-Cross™ termination module and Z-TOOL™ termination process combine for best-in-class termination time.

5. Compact

Slim and side-stackable for high-density applications. Supports “pass-thru” feature to mount from the front or rear of a faceplate.

6. High-Visibility Icon System

Printed icons allow designation for voice/data applications and also provide an additional color coding option.

7. Color Coding Capability

Bezel allows outlets to be color-coded for customer identification to match faceplates and other mounting accessories.

8. Compliant

Is compliant with UL2043 and is appropriate for use in air handling spaces.



Z-MAX Shielded Hybrid – No Door Outlet



Z-MAX Shielded Keystone Outlet




Z-MAX Shielded Panel Outlet



Flexibility and Simplified Ordering

A single hybrid outlet supports both angled and flat mounting orientations.



Enhanced Shielding Effectiveness

High level of shielded effectiveness exceeds ISO 360 degree shielding requirements via die cast housing and hinged cable retention/grounding clip.



100% Jack-to-Jack Plastic Isolation

Plastic bezels prevent contact between metal housings when side stacking to ensure ground quality and ANEXT performance.



Quick-Ground™ Termination

Cable shield is automatically terminated to the outlet without additional steps.

ELECTRICAL SPECIFICATIONS

CONTACT RESISTANCE	20 mΩ
INPUT TO OUTPUT RESISTANCE	200 mΩ
MIN. DIELECTRIC WITHSTAND VOLTAGE (CONTACT TO CONTACT)	1000 V DC or AC peak
MIN. DIELECTRIC WITHSTAND VOLTAGE	1500 V DC or AC peak
INSULATION RESISTANCE	500 MΩ
COMPATIBILITY	Backwards to Cat. 5e and Cat. 6
CURRENT RATING	1.5 A
PoE	Suitable for PoE Type 1, 2, 3, 4 and PoH

MECHANICAL – GENERAL

OPERATING TEMPERATURE	-10 to 60 °C (14 to 140 °F)
FLAMMABILITY RATING	UL 94 V-0
ECO-FRIENDLY FEATURES	RoHS, Lead-free, Halogen-free, PVC-free, Eco-friendly packaging (bulk packaging only)
HOUSING MATERIAL	Zinc die-cast
CONTACT MATERIALS	Copper alloy, plated with 1.27 microns (50 micro inches) minimum thick gold or equivalent at contact interface
PLASTIC MATERIALS	Flame retardant thermoplastic
DIMENSIONS (L X W X H)	41.2 x 14.5 x 21.1mm (1.6 x .570 x .832 in.)
SHIELD	360° enclosure

MECHANICAL – TERMINATION


WIRE SIZE RANGE (NOMINAL)	22-26 AWG solid and stranded
WIRE INSULATION DIAMETER RANGE (MAX)	1.48mm (0.058 in.)
CONDUCTOR OD SIZE (MAX)	0.60mm (0.023 in.)
CABLE OD (MAX)	9mm (0.354 in.)
RE-TERMINATIONS	5
WIRING	T568A/B

MECHANICAL – JACK

NUMBER OF PLUG INSERTION CYCLES	2500
MINIMUM PLUG RETENTION FORCE	50N (11.24 lbf)
PLUG COMPATIBILITY	Compatible with RJ145 (8-position) or RJ11 (6-position) plugs

COMPLIANCE

ANSI/TIA-568.2-D
ISO/IEC 11801-1 Ed 1.0
ETL Tested
IEEE 802.3an
IEEE 802.3af (Type 1)
IEEE 802.3at (Type 2)
IEEE 802.3bt (Type 3 and Type 4)
Power over HDBaseT (PoH)
ANSI/TIA 1096-A
IEC 60603-7-51
IEC 60512-99-002 (3rd party verified)

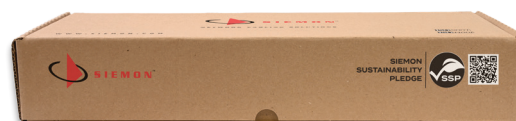

SIEMON
SUSTAINABILITY
PLEDGE



Siemon's **PowerGUARD** technology with a 75°C operating temperature improves heat dissipation for reduced length derating and bundling requirements in remote powering applications, including PoE and power over HDBaseT (PoH).

Ordering Information

Z-MAX® 6A Shielded Outlet, T568A/B

Z6A - S (X) (XX) (X) (X)

MOUNTING STYLE	BEZEL COLOR	DOOR OPTION	PACKAGE TYPE
(Blank) = Hybrid Flat/Angled K = Keystone* P = Panel**	(Blank) = No Color (Panel Only) 01 = Black 02 = White 03 = Red 04 = Gray 05 = Yellow 06 = Blue 07 = Green 09 = Orange 20 = Ivory 80 = Light Ivory	(Blank) = No Door D = Door (Hybrid Only)	(Blank) = Single Standard Pack A = 24-Count Bulk Pack*** B = 100-Count Bulk Pack***

*Keystone version is designed for integration with various third-party mounting products and is not compatible with standard Siemon MAX mounting products.

Keystone versions are also not compatible with icons and do not have door options.

**Z-MAX 6A Shielded Panel Outlets are designed for use Z-MAX 6A Shielded panels only.

***Eco-friendly hybrid, keystone and panel outlet bulk packs sold with MoQ of 24 and 100 and order increment of 24 and 100 outlets.

Outlet terminates S/FTP, F/FTP, U/FTP and F/UTP cable constructions with 22 – 26 AWG (0.64 – 0.51mm) solid and 26 AWG (0.48mm) stranded conductors, with up to 0.60mm diameter conductors and up to 1.48mm diameter over insulation.

Z-MAX outlet termination tool Z-TOOL is included in each standard pack of 50 outlets and bulk pack of 24 and 100 outlets.

Each Z-MAX 6A hybrid outlet includes 1 printed icon set with the following color/print options.



Front

- 1 Red Data
- 1 Blue Data
- 1 Bezel Color-Matching Data
- 1 White Blank



Back

- 1 Red Voice
- 1 Blue Voice
- 1 Bezel Color-Matching Voice
- 1 Bezel Color-Matching Blank



24-Count Bulk Pack shown for reference.



For information on our eco-friendly packaging, see the QR Code on page 2.



SCAN TO DOWNLOAD
SPEC SHEET

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America

P: (1) 860 945 4200

Mexico

P: (521) 556 387 7708/09/10

Latin America

P: (571) 657 1950/51/52

Europe

P: (44) 0 1932 571771

Asia Pacific

P: (61) 2 8977 7500

Siemon OEM Technologies

P: (1) 860 945 4213
www.siemon.com/OEM

China

P: (86) 215385 0303

India, Middle East & Africa

P: (971) 4 3689743